




Aperture 20mm

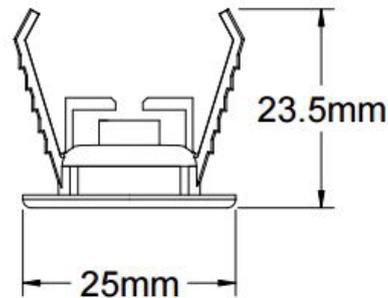

- Suitable for Remote Fixing of Charge LED
- Sits Adjacent to the Light Fitting
- Requires a 20mm Cut-Out
- Suitable for Plasterboard or Tiled Ceilings
- Simple Installation

Where a conversion is being carried out and there is limited space within the luminaire to mount the charge LED, it must be mounted remotely from the fitting. The CRL5 is a simple to fit, white plastic moulded holder that recesses into the ceiling adjacent to the fitting.

This accessory is included with many of our remote conversion kits, however is also available as an accessory.

Order Codes

CRL5	White Ceiling Recess Charge LED Holder
------	--

Technical Details:

Material	UV Stabilised Polycarbonate
Glow Wire Test	850 °C
Cut-Out Required	20mm
Bezel Diameter	25mm
Maximum Ceiling Thickness	25mm
Charge LED Head Size	6.5mm

Installation Instruction:

1. Drill 20mm hole into the ceiling at your desired location near the fitting to which it relates
2. Feed the charge LED from ceiling void through the 20mm aperture
3. Clip the charge LED into the rear of the CRL5 ensuring the retainers hold the lip of the LED in place
4. Hold in the arms and push the CRL5 into the 20mm aperture